




SINCE 1848

Landscaper Bodies



Standard Features

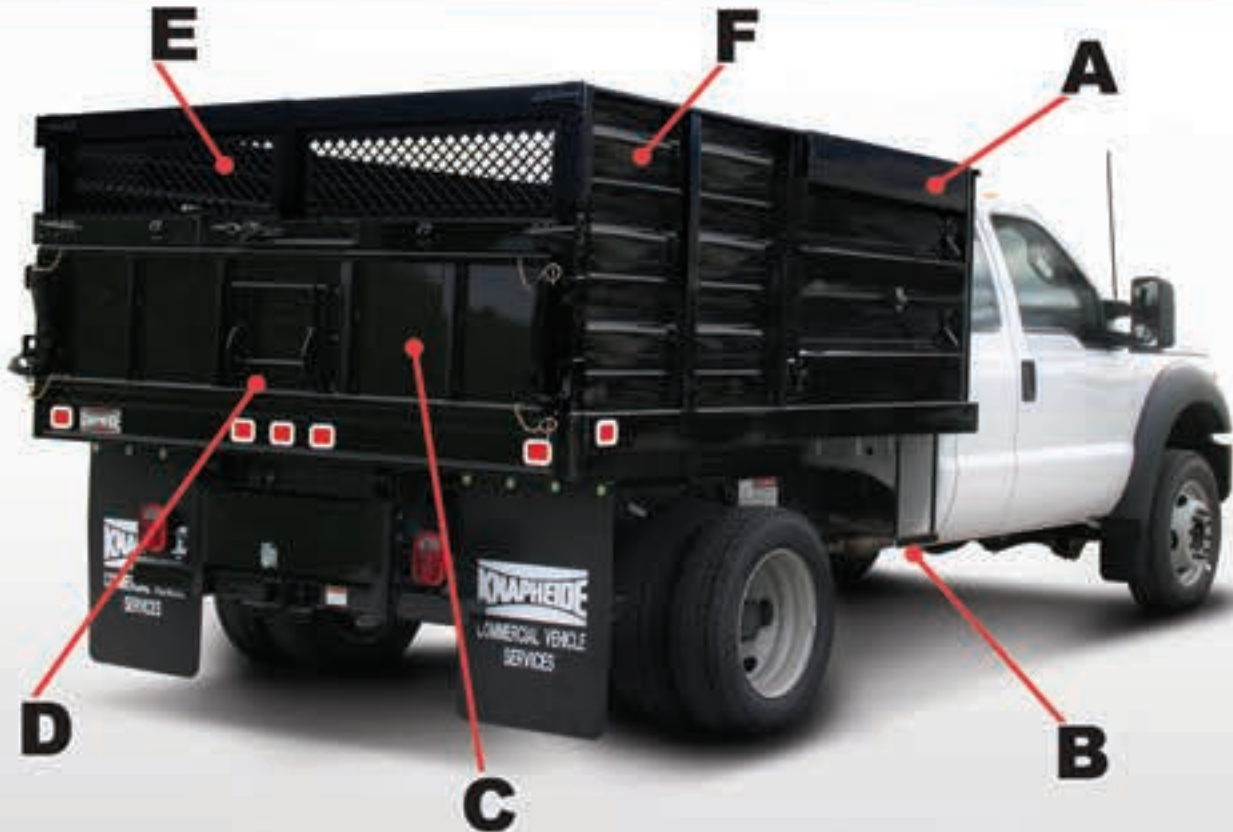

- A)** Side access door on curbside has 50" wide opening for pallets, balled trees, shrubs, bagged materials, etc. Side access door can be locked in the open position
- B)** Step and grab handle for the side access door are provided to access the cargo area
- C)** Double-acting tailgate allows for multiple drop-down positions and bottom spreading positions
- D)** Tailgate includes a center metering gate with a 17" opening for transferring mulch, dirt, sand, or gravel into a wheelbarrow
- E)** Rear cargo gates are fully-punched, center-locking, and hinged for full 270 degree opening to sides. Rear cargo gates can be latched in the open position
- F)** 40" tall side panels are constructed of roll-formed 14 gauge steel and reinforced by 13 gauge steel stakes. Side panels include tarp tie-down rail

And other features not shown above:

- Clearance lights and an automotive wire harness are included with body
- Floor assembly is constructed of 10 gauge high strength steel floor plate with 10 gauge formed cross sills and 5" structural long sills
- Material tie-down brackets are located in both front corners of cargo area
- Corrosion protection is provided through complete immersion in Knapheide's 12 stage electrodeposition prime paint system
- Bodies are fully protected with Knapheide's water based self-healing undercoat

Available Models

Chassis	Landscaper Model	Nominal Body Length	Storage Pack	Nominal Pack Length	Weight (with Hoist)	Capacity** (cu. yd.)
60" CA Dual Rear Wheel	PLB-090B	9'	None	N/A	2036	8.8
84" CA Dual Rear Wheel	PLB-090B	9'	KPLS-942463A	2'	2604	8.8
	PLB-110B	11'	None	N/A	2272	10.2
	PLB-120B-P	12'	None	N/A	2300	11.6
108" CA Dual Rear Wheel	PLB-110B	11'	KPLS-942463A	2'	2840	10.2
	PLB-120B-P	12'	KPLS-942463A	2'	2868	11.6

*Mounted weight includes 600lbs. for optional model KH-1512SF-EE subframe hoist.

**For reference only. Do not exceed GVWR or GAWR of the chassis.



PLB-090B



PLB-110B



PLB-090B with KPLS-942463A



PLB-110B with KPLS-942463A

Subframe Hoists

- Recommended subframe hoist for all models is KH-1512SF-EE
- Rugged, stable lift arm construction
- Double-acting, for power both up and down
- Controlled by a 12 volt hydraulic pump with a switch pendant
- Covered by three year warranty



Landscaper Storage Packs



- The street side of KPLS-942463A features a personal storage compartment which is 24" wide x 20" deep x 63" tall
- Personal storage compartment includes four combination stationary/swivel hooks and a lockable compartment door



- The curb side of KPLS-942463A features a tool storage compartment that is 24" wide x 63" tall x 74" deep with two fixed shelves and a pull out bin
- The pull out tool bin is a 19.5" wide x 10" tall x 71" deep punched metal bin with a handle and a lock
- The pull out tool bin extends 48" out on the curb side only

Popular Options



Cab protector is 36" long and 92" wide and has D-ring tie downs. Available with KPLS-942463A



Combination Class V hitch/ICC bumper is rated at 12,000lbs. max. trailer weight and 2,400lbs. tongue weight.



Model SRDPLBA, 40" high, solid swing out rear doors in lieu of cargo gates and tailgate.

The Knapheide Manufacturing Company
1848 Westphalia Strasse
Quincy, Illinois 62305
(217) 222-7131
www.knapheide.com
knapheide@knapheide.com

L59 5M 0114 G



Copyright© 2010 The Knapheide Manufacturing Company

For more information:



Specifications subject to change without notice.
Some models shown with optional equipment.